

- 10 μ F+



- 10 μ F+



- 2 μ F+



220 nF



220 nF




4,7 k




4,7 k




1 k



1 k



39 k




100




NTC



Si



B E



B E



B E

pnp C

B E

pnp C

npn C

pnp C

npn C

S1

P1 500 k Ω

S1b S1a La 1

34

34

34

35

35

35

36

36

36

37

37

37

38

38

38

39

39

39

40

40

40

41

41

41

42

42

42

43

43

43

44

44

44

45

45

45

46

46

46

47

47

47

48

48

48

S S

S S

S S

Sa Sa

Sa Sa

Sa Sa

Sb Sb



Sb Sb

Sb Sb

Sb Sb


Sb Sb

Sb Sb



-9,0V
-7,5V
-6,0V
-4,5V
-3,0V
-1,5V

zur Schaltermarkierung

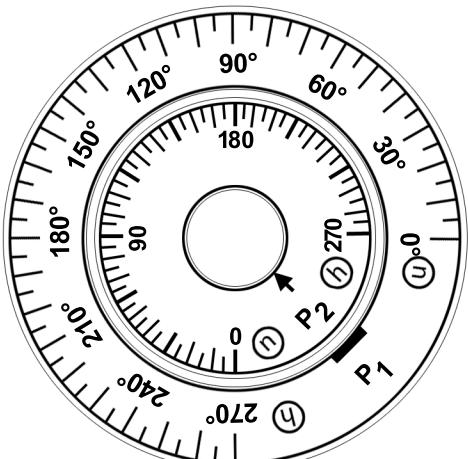

Best. - Nr. 61-4540.7